

inox | **t** +44(0)1702 468165
LIGHTING INNOVATORS | **e** sales@inox.co.uk
| **w** inox.co.uk

SlimLamp Slide
LED for Display, Cabinet, Furniture & Cove

Stable, Secure and Smart Locking System



- Easy slide connecting system
- Slim design with seamless lighting
- Dimmable
- Round diffuser(Square also available)
- Slide-Up Replacing System






Specification

Model Name	Voltage Input	Energy Consumption	Power Factor	Luminous Flux	Energy Efficiency	Color Rendering	Available Color	Operating temperature	Dimming
SSL5 30K-UNV	AC100~240V	5W	PF > 0.9	425 lm	95 lm/W	Ra > 80	2,700K/3,000K/3,500K/4,000K/6,000K	0~45°C	Non dimmable
SSL10 30K-UNV	AC100~240V	10W	PF > 0.9	850 lm	95 lm/W	Ra > 80	2,700K/3,000K/3,500K/4,000K/6,000K	0~45°C	Non dimmable
SSL15 30K-UNV	AC100~240V	15W	PF > 0.9	1,275 lm	95 lm/W	Ra > 80	2,700K/3,000K/3,500K/4,000K/6,000K	0~45°C	Non dimmable
SSL20 30K-UNV	AC100~240V	20W	PF > 0.9	1,700 lm	95 lm/W	Ra > 80	2,700K/3,000K/3,500K/4,000K/6,000K	0~45°C	Non dimmable
DSSL10 30K-UNV	AC100~240V	10W	PF > 0.9	850 lm	95 lm/W	Ra > 80	2,700K/3,000K/3,500K/4,000K/6,000K	0~45°C	Dimmable
DSSL15 30K-UNV	AC100~240V	15W	PF > 0.9	1,275 lm	95 lm/W	Ra > 80	2,700K/3,000K/3,500K/4,000K/6,000K	0~45°C	Dimmable
DSSL20 30K-UNV	AC100~240V	20W	PF > 0.9	1,700 lm	95 lm/W	Ra > 80	2,700K/3,000K/3,500K/4,000K/6,000K	0~45°C	Dimmable

Dimension

Model Name	Voltage Input (V)	Energy Consumption (W)	A (mm)	B (mm)	C (mm)
SSL5 30K-UNV	AC100~240	5	290	32.3	35.2
SSL10 30K-UNV	AC100~240	10	580	32.3	35.2
SSL15 30K-UNV	AC100~240	15	870	32.3	35.2
SSL20 30K-UNV	AC100~240	20	1,160	32.3	35.2
DSSL10 30K-UNV	AC100~240	10	580	32.3	35.2
DSSL15 30K-UNV	AC100~240	15	870	32.3	35.2
DSSL20 30K-UNV	AC100~240	20	1,160	32.3	35.2

* Standard type (Round diffuser)

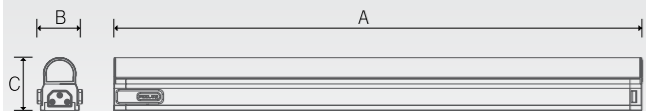


Notice

- Max.connection(Dimming) : 20 pcs
- Max.connection(Non dimming) : 400W
- 5W(80pcs), 10W(40 pcs), 15W(26pcs), 20W(20 pcs)

* Optional type (Square diffuser)



Connection

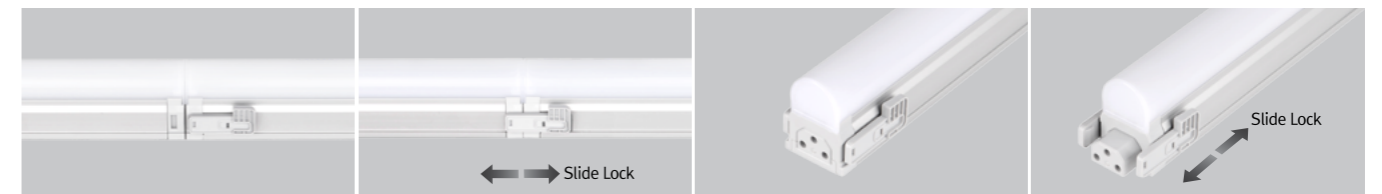

Accessories


Ⓐ Connecting cable

SSLPTC/T	SSLPTC1/T	SSLPTC2/T	SSLPTC4/T	SSLPTC6/T
150mm(6inch)	300mm(1feet)	600mm(2feet)	1,200mm(4feet)	1,800mm(6feet)




Ⓑ Power cord

SSLPC230/T

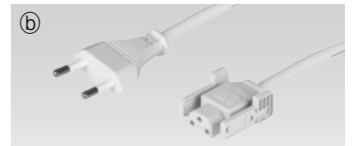

Ⓒ Open power cord

DSSLOPC230/T

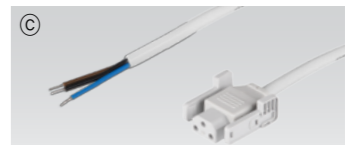

Ⓓ Mounting bracket (Metal Bracket)

SSL-BRACKET1(A) : 1set = 2pcs
SSL-BRACKET1(B) : 1set = 3pcs

