


SlimLine LED
LED for Display, Cabinet, Furniture & Cove

Seamless LED



- Rigid aluminum extruded body permits effective heat emission
- Dark spot free at the linking point
- Transparent, Ivory white Diffuser
- Eco friendly product, No emission of Mercury and CO2
- AC power driver built in (SMPS in not needed)
- Compatible with accessories for fluorescent DimSlimLine by PWM controller

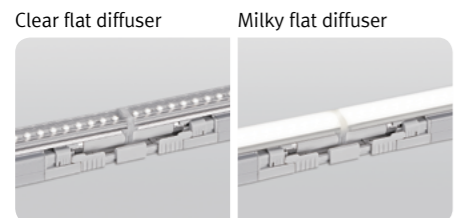




Specification

Model Name	Power Input	Lamp Power	Luminous Flux	Efficiency	Color Rendering	Available Color	Operating Temperature
LDSLL10-UNV	AC 100~240V	10W	700lm	70lm/W	Ra > 80	2,700K/3,000K/3,500K/4,000K/6,000K	0~45°C
LDSLL15-UNV	AC 100~240V	15W	1,050lm	70lm/W	Ra > 80	2,700K/3,000K/3,500K/4,000K/6,000K	0~45°C
LDSLL20-UNV	AC 100~240V	20W	1,400lm	70lm/W	Ra > 80	2,700K/3,000K/3,500K/4,000K/6,000K	0~45°C

Dimension


Model Name	Lamp Power (W)	A (mm)	B (mm)	C (mm)	D (mm)
LDSLL10-UNV	10	582.5	33	37.5	50.2
LDSLL15-UNV	15	882.5	33	37.5	50.2
LDSLL20-UNV	20	1182.5	33	37.5	50.2

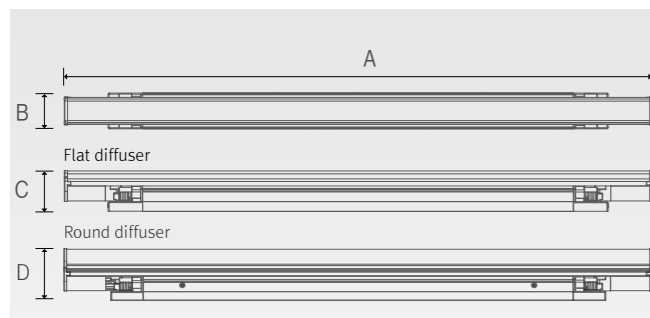

Max. connection

- Max. connection(Dimming) : 20pcs
- Max. connection(Non-Dimming) : 600W
10W(60 pcs), 15W(40 pcs), 20W(30pcs)

Dimming

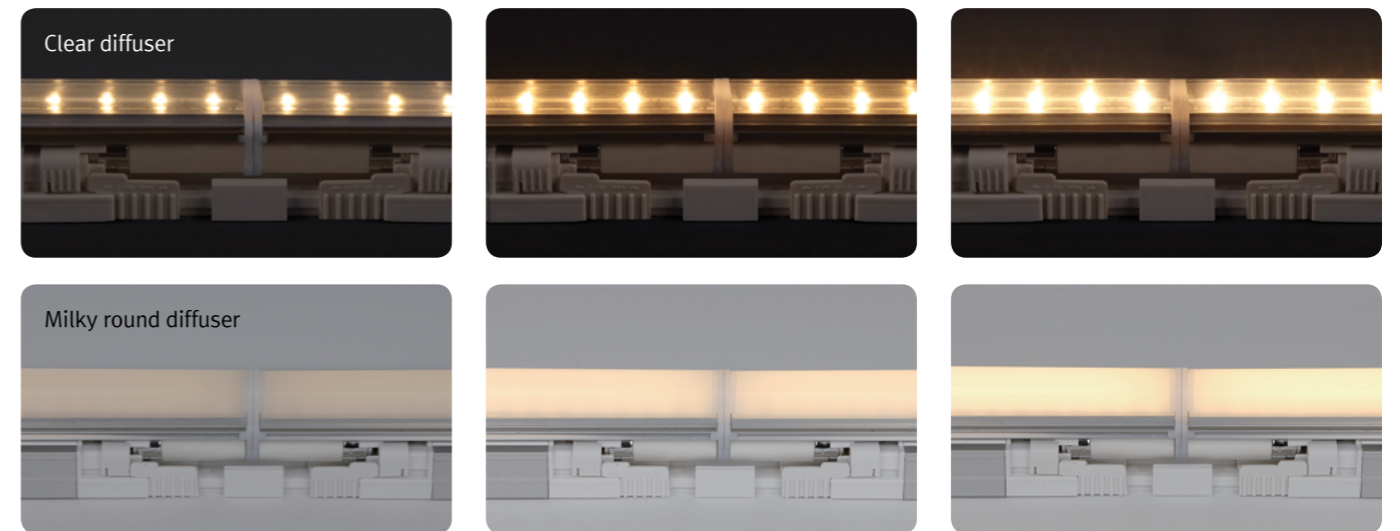

Accessories

Ⓐ Connecting cables

DSLLPTC	DSLLPTC1	DSLLPTC2	DSLLPTC4	DSLLPTC6
150mm(6inch)	300mm(1feet)	600mm(2feet)	1200mm(4feet)	1800mm(6feet)

Ⓑ Direct connector

SLLCPL

Ⓒ Connecting cable between fitting and dimming controller

DSLLOPC230

Ⓓ LED tube

LSSL10T4KFC	LSSL15T4KFC	LSSL20T4KFC
10W 4000K TUBE	15W 4000K TUBE	20W 4000K TUBE

Ⓔ End cap

SLL-CAP

★ Dimming Controller

Ⓛ Dimming Switch, Ⓜ Wireless control, Ⓨ Interface

