

inox
LIGHTING INNOVATORS

t +44(0)1702 468165

e sales@inox.co.uk

w inox.co.uk



TuneLight 2

Dimmable LED for cabinet

Display for TuneLite




- AC Power driver built in
- Isolation circuit applied

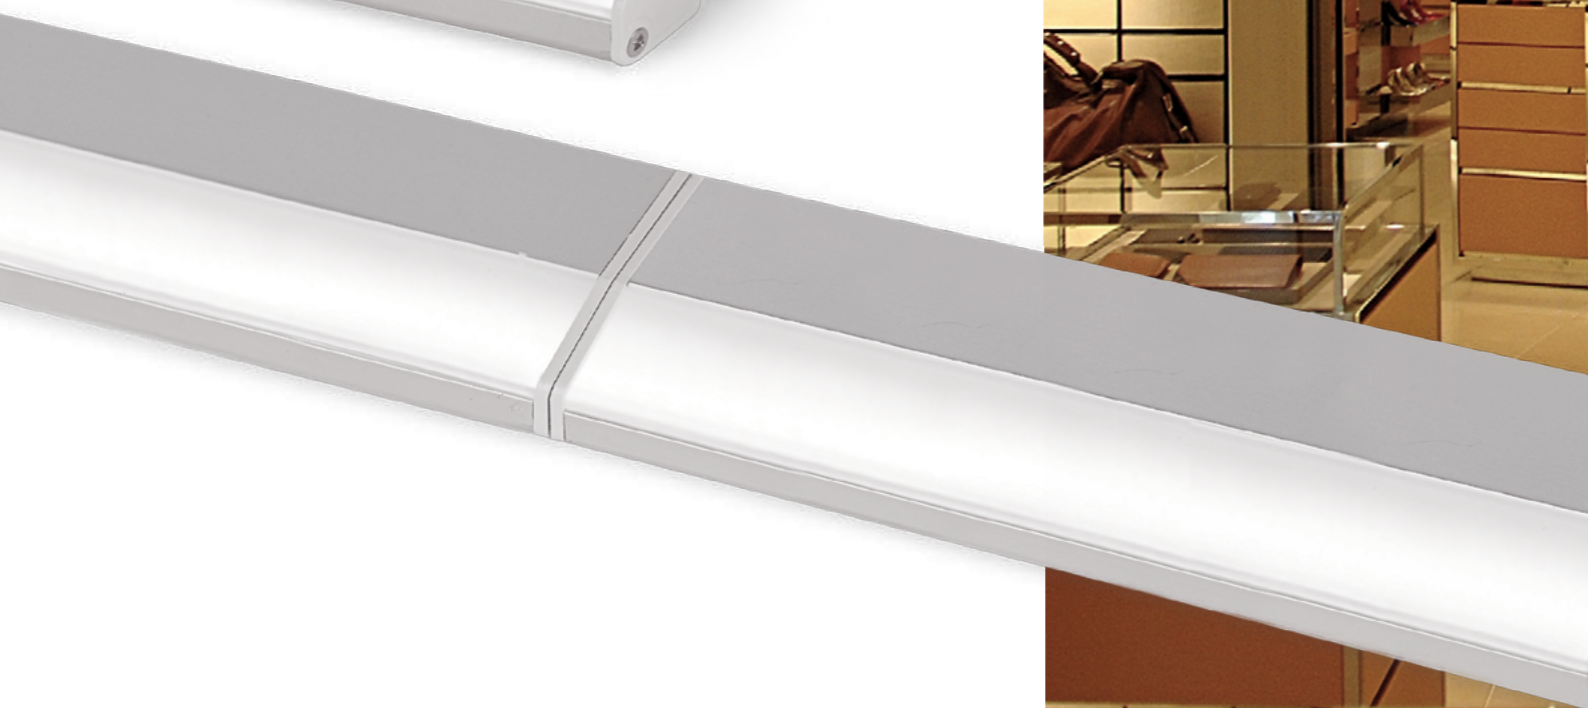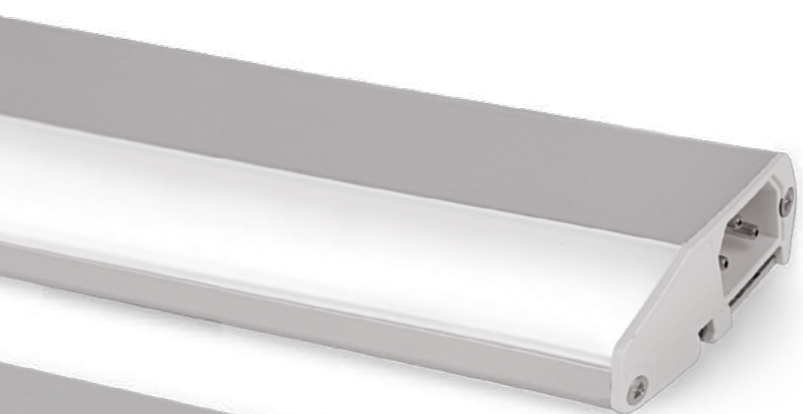



Various options

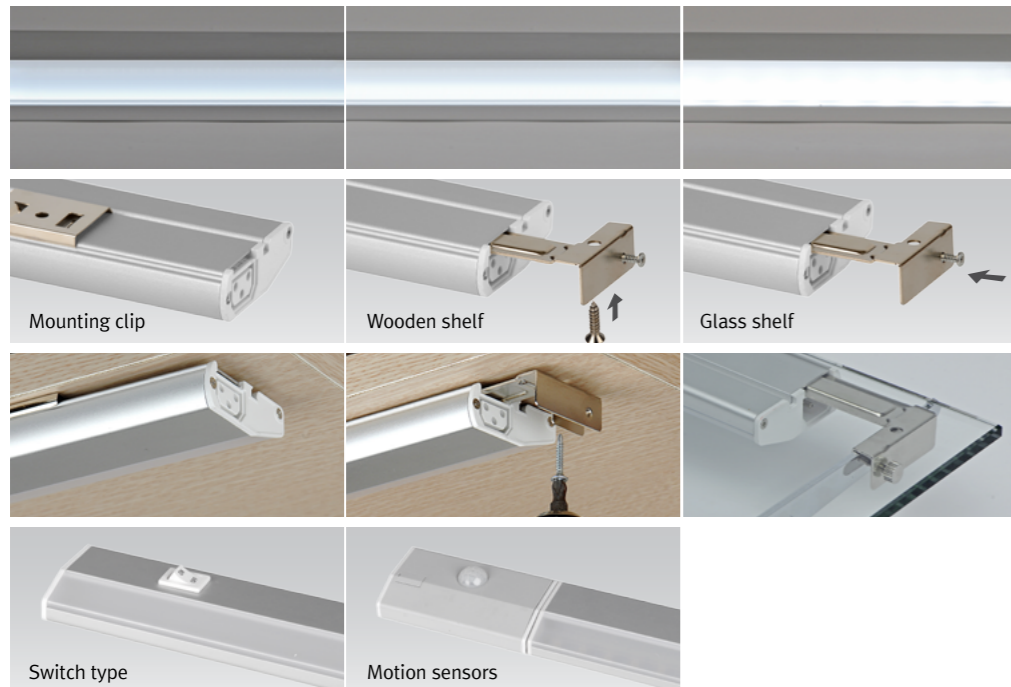


Specification

Model name	Power Input	Lamp Power	Luminous Flux	Efficiency	Color Rendering	Available Color	Operating Temperature
TUN7 40K-UNV-C90	AC100~240V	7W	455 lm	65 lm/W	Ra > 90	2,700K/3,000K/3,500K/4,000K/6,000K	0~45°C
TUN11 40K-UNV-C90	AC100~240V	11W	715 lm	65 lm/W	Ra > 90	2,700K/3,000K/3,500K/4,000K/6,000K	0~45°C
TUN15 40K-UNV-C90	AC100~240V	15W	975 lm	65 lm/W	Ra > 90	2,700K/3,000K/3,500K/4,000K/6,000K	0~45°C

Dimension

Model name	Power Input (V)	Lamp Power (W)	A (mm)	B (mm)	C (mm)
TUN7 40K-UNV-C90	AC100~240	7	526	52	18
TUN11 40K-UNV-C90	AC100~240	11	836	52	18
TUN15 40K-UNV-C90	AC100~240	15	1,145	52	18

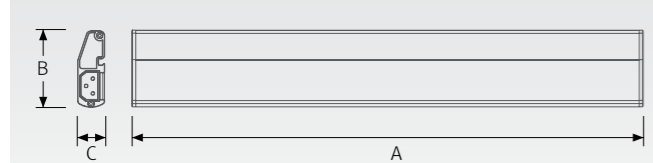


Max. connection

- Max. connection(Dimming) : 20pcs
- Max. connection(Non-Dimming) : 400W
7W(57pcs), 11W(36pcs), 15W(26pcs)

Accessories


Ⓐ Connecting cable for Non-dimming

TUNPTC/T	TUNPTC1/T	TUNPTC2/T	TUNPTC4/T	TUNPTC6/T
150mm(6inch)	300mm(1feet)	600mm(2feet)	1200mm(4feet)	1800mm(6feet)

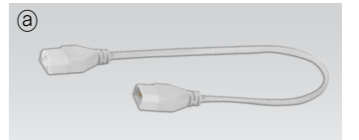


Ⓑ Connecting cable for dimming

DTUNPTC/T	DTUNPTC1/T	DTUNPTC2/T	DTUNPTC4/T	DTUNPTC6/T
150mm(6inch)	300mm(1feet)	600mm(2feet)	1200mm(4feet)	1800mm(6feet)

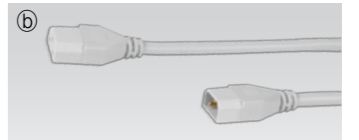

Ⓒ Power Cord

TUNPC230/T

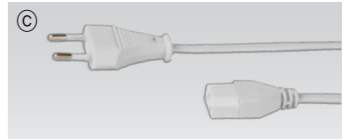


Ⓓ Power Cord

TUNPC230/SM2/T




Ⓔ Open Power Cord

DTUNOPC230/T

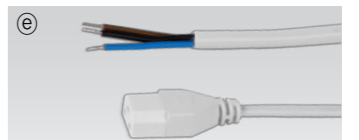

⓫ Open Power Cord

DTUNOPC230/SM2/T

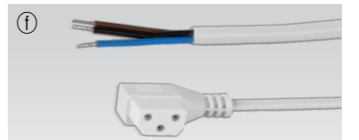

⓬ Direct connector

TUNCPL




⓭ End Cap

TUN-CAP




⓮ Mounting bracket

TUN-Bracket

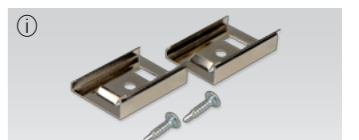

⓯ Mounting bracket

TUN-Bracket 1

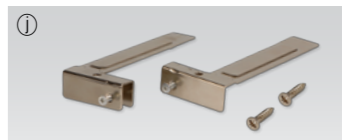

⓰ Dimming controller

FSA-P2D/BK



⓱ Dimming controller



⓲ Motion sensors

